




MoniServ, Inc.

<http://www.moniserv.com>


<http://www.lcdpart.com>

<http://www.monitoronsale.com>


Remove and install Backlight Inverter procedure for ViewSonic VP181

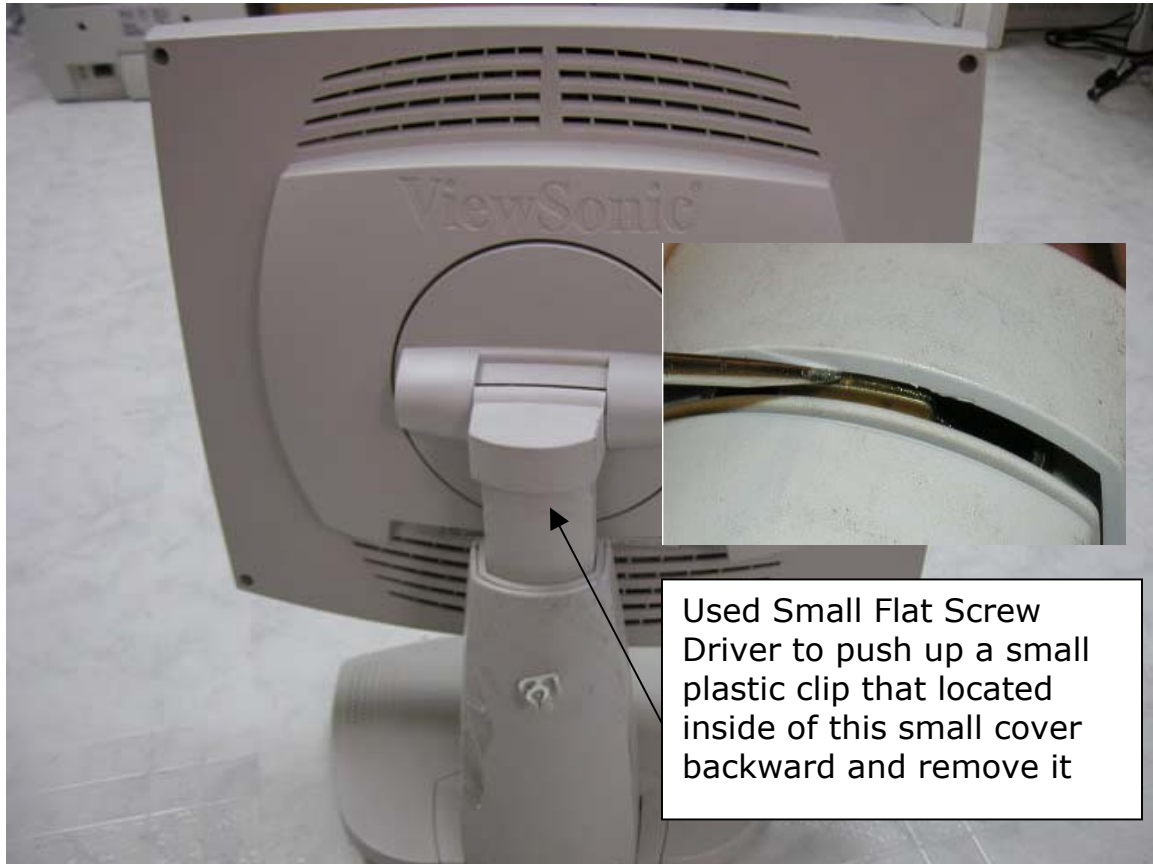

Note: The easiest to remove this small cover would be set the monitor face down.

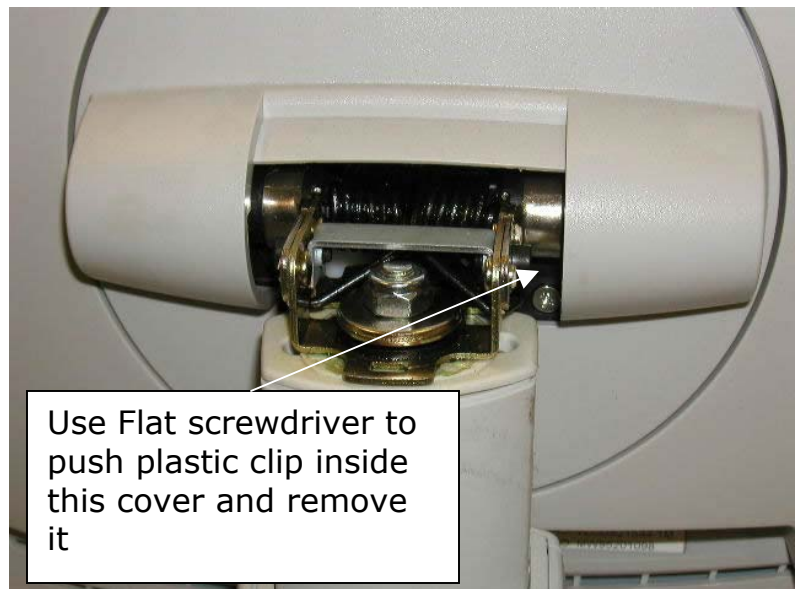


Note: There are two small plastic clips on both side of this cover, you just need to push one side and it can be easily remove.

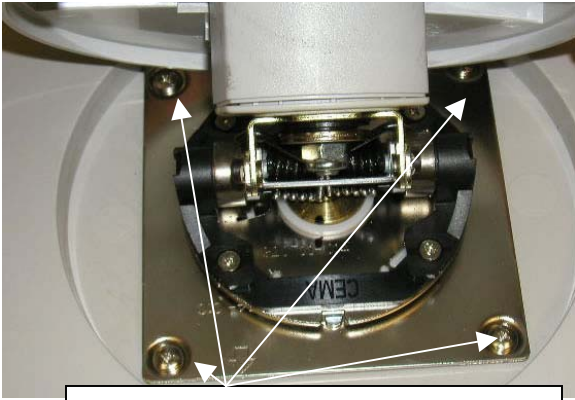



Unscrew 4 screws and
remove swivel base




Remove 4 screws first,
then Use Flat screw drive
to open the cover shown
as small photo, Remove
Back Cover

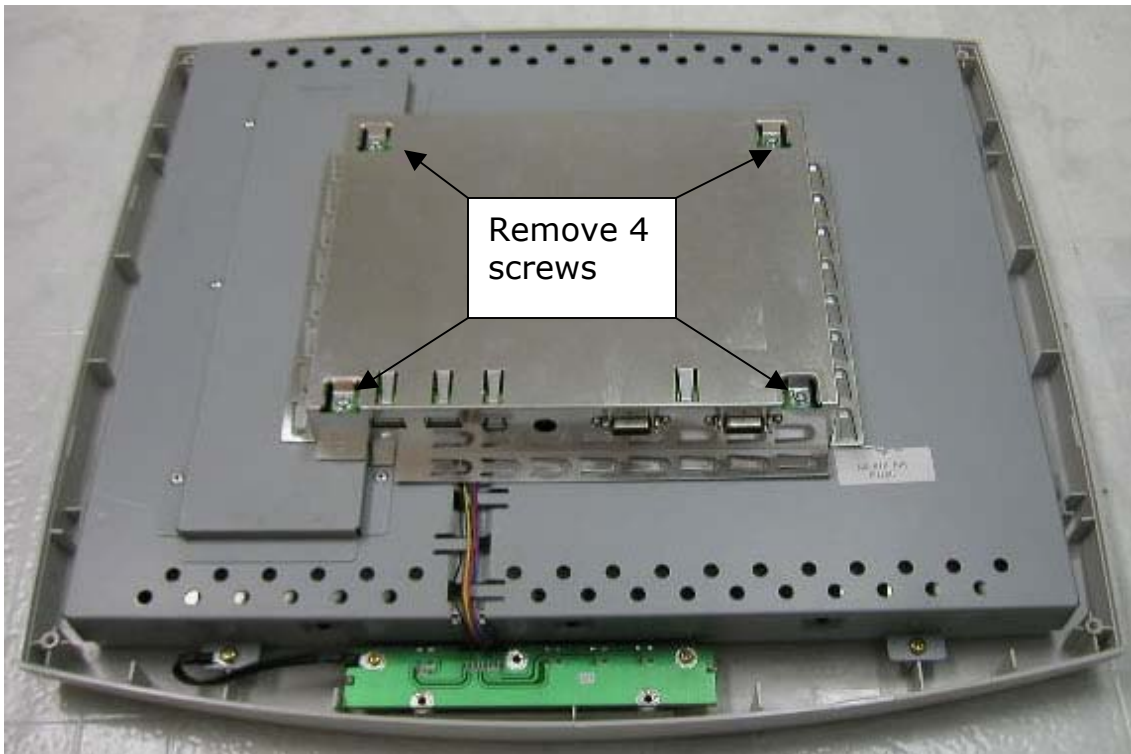

Remove 4
screws

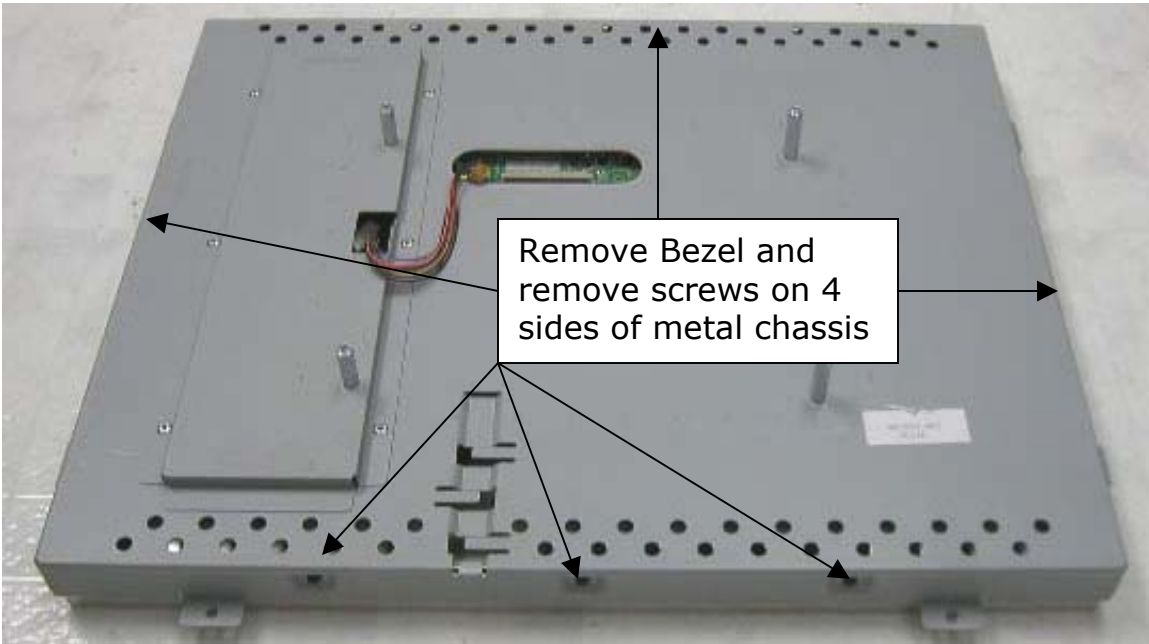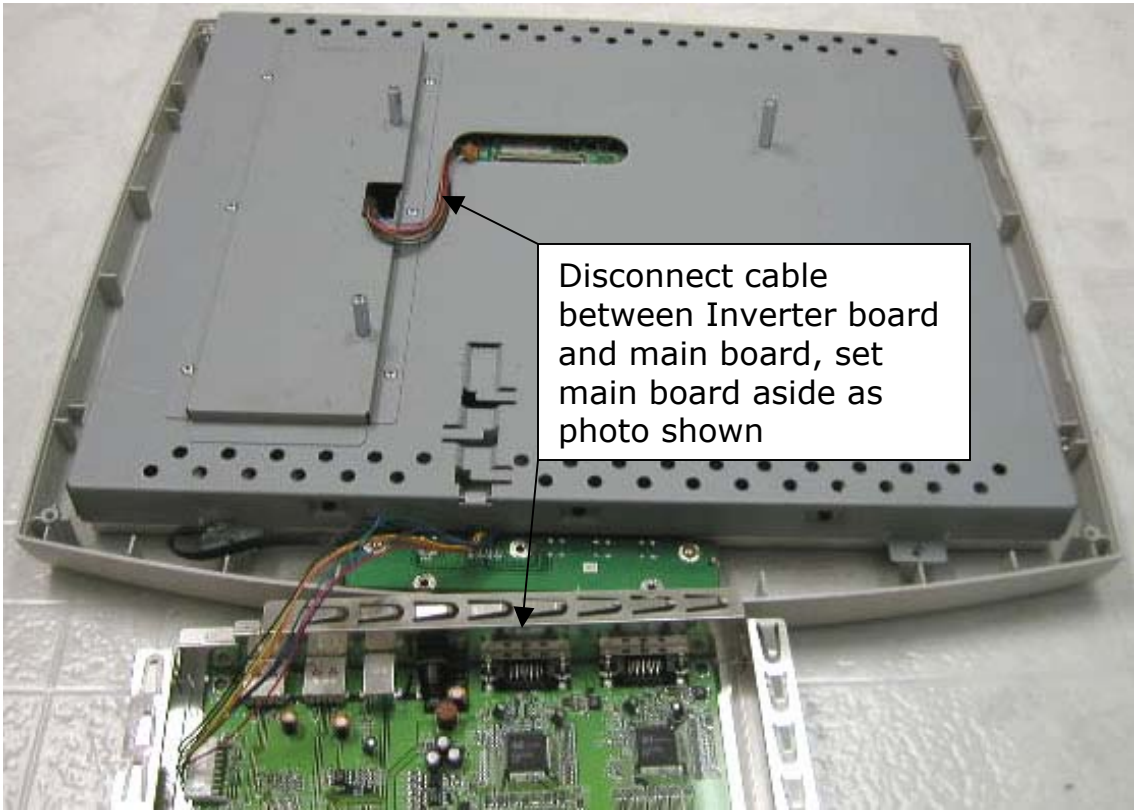

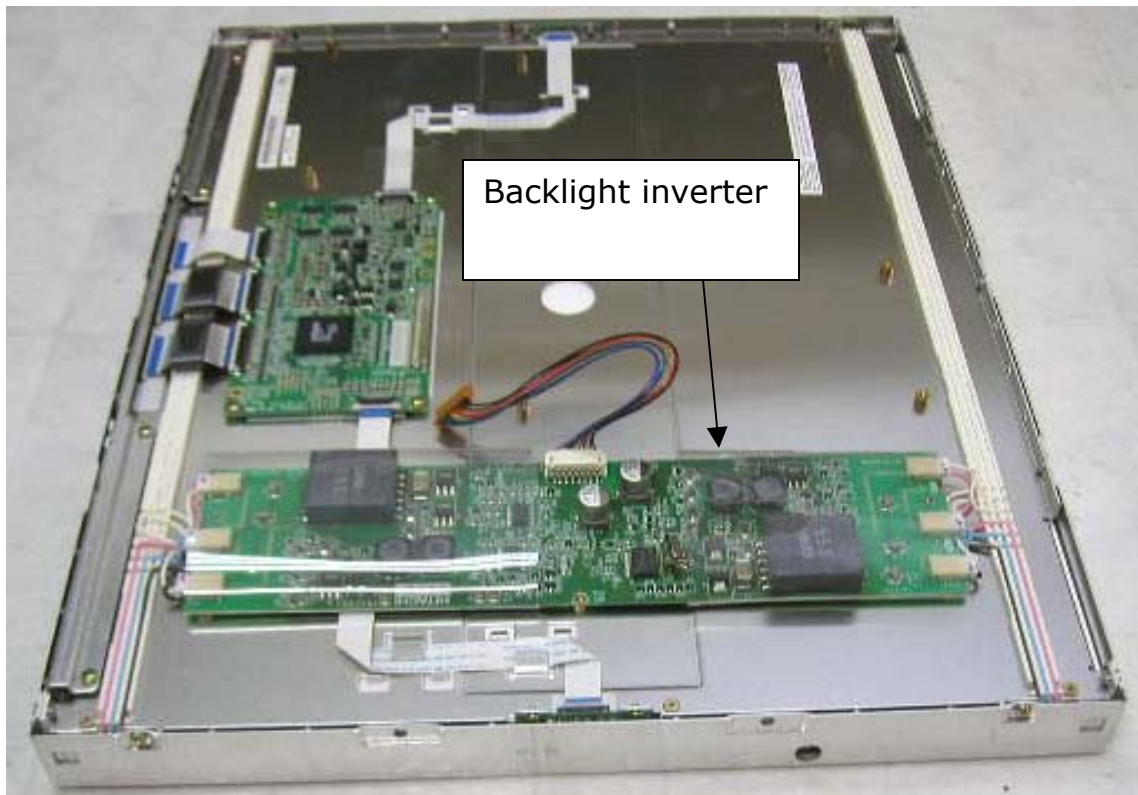

Disconnected 6 backlight connectors and Control connector. Replace with MoniServ INVC551MSS. Re-install all component, metal chassis, circuit board and cover back. VP181 should back to work again.